



Max-Flo XL™

MEDIUM HEAD PUMP SERIES

PUMPS



Advanced hydraulics and the latest conveniences combined with incredible economy and performance.

- Advanced hydraulics improves efficiency and priming
- Seamlessly retrofits with the entire Max-Flo line
- All models include 1½" x 2" union connections
- Pressure testable to 50 psi
- Self-priming suction lift up to 8' above water level




Aligns with the entire Max-Flo line for seamless retrofit installations

All models include 1½" x 2" union connections

Advanced hydraulics for increased efficiency and priming ability

Self-priming (suction lift up to 8' above water level)

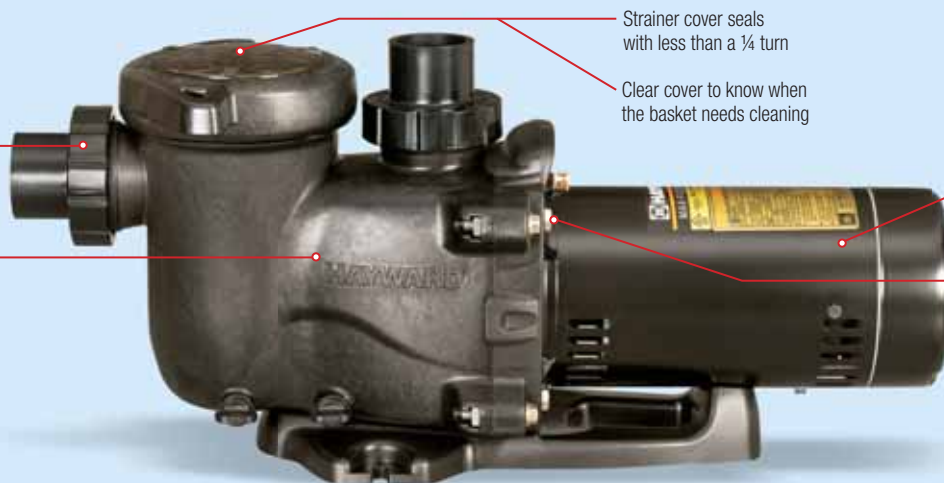

Strainer cover seals with less than a ¼ turn

Clear cover to know when the basket needs cleaning

Pressure testable to 50 psi maximum

Heavy-duty motor

Easy to service with just 4 bolts to remove


Optional riser base (SPX2300GR) provides alignment with Sta-Rite® Dyna-Pro®

Max-Flo XL™ Pump


Max-Flo XL is the latest addition to the proven Max-Flo™ line. It's the ideal self-priming, medium-head pump for entry-level new construction and aftermarket applications.

Max-Flo XL's advanced hydraulics deliver the performance and reliability pool pros need, while its silent operation, conveniences and exceptional value will make it a favorite with pool owners.

| MAX-FLO XL MODEL NUMBER | TOTAL HP | MAX-RATED HP | SERVICE FACTOR | VOLTAGE | UNION CONNECTORS | DIMENSION "A" | CTN. QTY. | CTN. WEIGHT |
|---|----------|--------------|----------------|-------------|------------------|---------------|-----------|-------------|
| ENERGY EFFICIENT MAX RATED SINGLE-SPEED | | | | | | | | |
| SP2305X7EE | 0.95 | ¾ | 1.27 | 115/208-230 | 1.5" x 2" | 13 ¾" | 1 | 34 lbs |
| STANDARD EFFICIENT MAX RATED SINGLE-SPEED | | | | | | | | |
| SP2305X7 | 0.95 | ¾ | 1.27 | 115/208-230 | 1.5" x 2" | 13 ¾" | 1 | 34 lbs |
| SP2307X10 | 1.25 | 1 | 1.25 | 115/208-230 | 1.5" x 2" | 14 ¼" | 1 | 37 lbs |
| SP2310X15 | 1.65 | 1½ | 1.1 | 115/208-230 | 1.5" x 2" | 15 ½" | 1 | 42 lbs |
| SP2315X20 | 2.10 | 2.0 | 1.05 | 115/208-230 | 1.5" x 2" | 15 ½" | 1 | 45 lbs |
| STANDARD EFFICIENT MAX RATED DUAL-SPEED | | | | | | | | |
| SP2307X102 | 1.25 | 1 | 1.25 | 230 | 1.5" x 2" | 15" | 1 | 41 lbs |
| SP2310X152 | 1.65 | 1½ | 1.1 | 230 | 1.5" x 2" | 15 ½" | 1 | 43 lbs |
| SP2315X202 | 2.10 | 2.0 | 1.05 | 230 | 1.5" x 2" | 16" | 1 | 46 lbs |

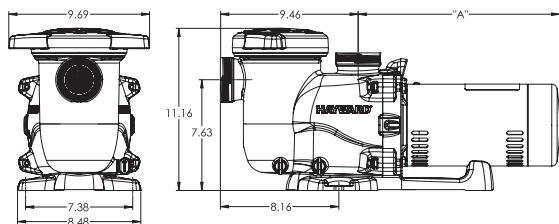

MAX-FLO XL FLOW VS TOTAL HEAD

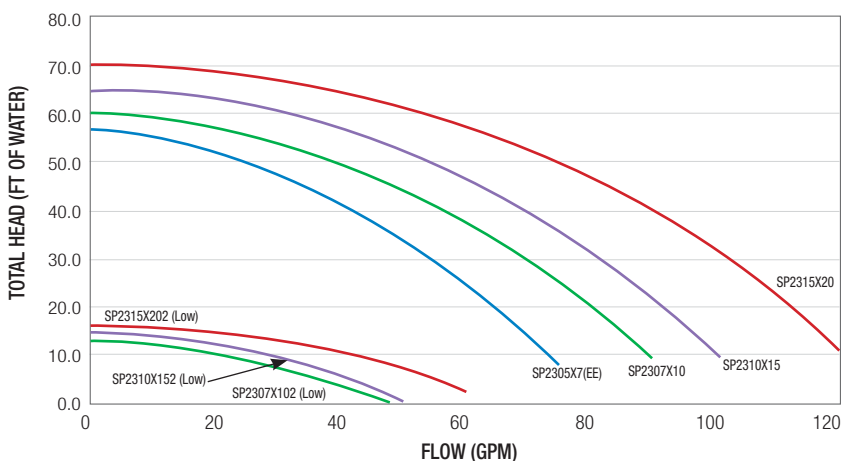

To take a closer look at Max-Flo XL or other Hayward products, go to www.hayward.com or call 1-888-HAYWARD.

Max-Flo XL Series Pumps are listed by:

